

**(ES-6) CITY OF SACO
STABILIZED CONSTRUCTION ENTRANCE**

N.T.S.

Short Form Specifications:

Material: **2 INCH STONE, FILTER FABRIC**

QA/QC: **ADD/REMOVE STONE AS MUD AND SILT MATERIAL ACCUMULATE. INSPECT AND SWEEP ROADWAY AS NEEDED.**

Submittal: **STONE GRADATION, FILTER FABRIC**

Completion: **REMOVE UPON COMPLETION OR ABANDONMENT OF ACCESS POINT.**

Installation: **PRIOR TO ANY CONSTRUCTION TRAFFIC LEAVING A SITE ONTO THE ROADWAY**

Design Checklist:

Use: **INSTALL WHEREVER TRAFFIC WILL BE LEAVING A CONSTRUCTION SITE ONTO A PUBLIC ROADWAY.**

Computations: **N/A**

Water Quality Provisions:

PROTECTION FROM EXCESS SEDIMENTS ENTERING PUBLIC ROADWAY DRAINAGE SYSTEMS.

Cross Reference:

Zoning/Site Plan Review: **ARTICLE 8 – GOOD NEIGHBOR PERFORMANCE STANDARDS, SECTION 806 – EROSION CONTROL**


Subdivision Review: **ARTICLE 5 – PRELIMINARY PLAN, PARAGRAPH 5.2.2(17)**

Erosion Control BMP: **SECTION 18.0 – STABILIZED CONSTRUCTION ENTRANCE**


ASCE MREP No. 77: **N/A**

MEDEP STORMWATER BMP: **N/A**

NOTE:
CONTRACTOR SHALL ADD STONE TO ENTRANCE
AS MUD/SILT MATERIAL ACCUMULATES

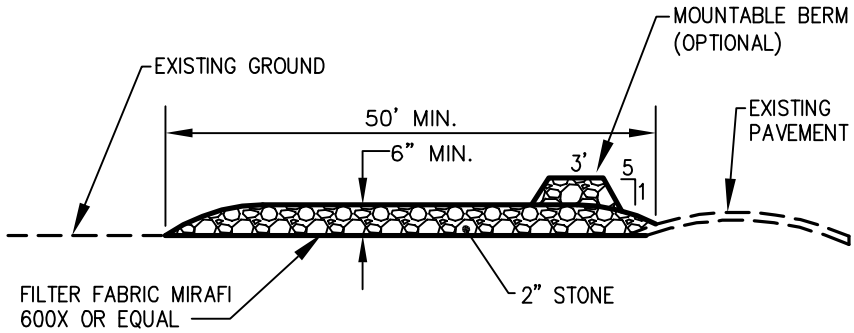

SECTION VIEW

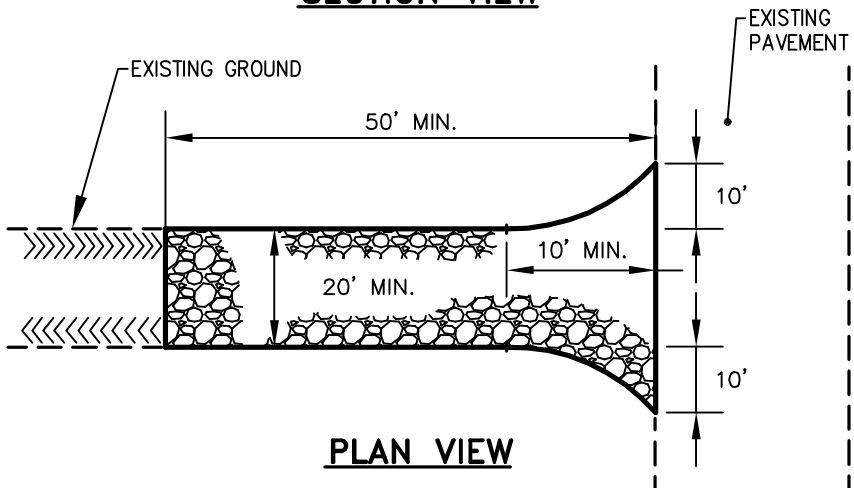

PLAN VIEW

(ES-6) CITY OF SACO
STABILIZED CONSTRUCTION ENTRANCE

N.T.S.